


Wiring Diagram

Coil Wiring For Distributor-Mounted Single-Fire Ignition (2 Plugs/Cylinder, 3 Ohm, Dual-Fire Coils)

Rear Cylinder Coil

Front Cylinder Coil

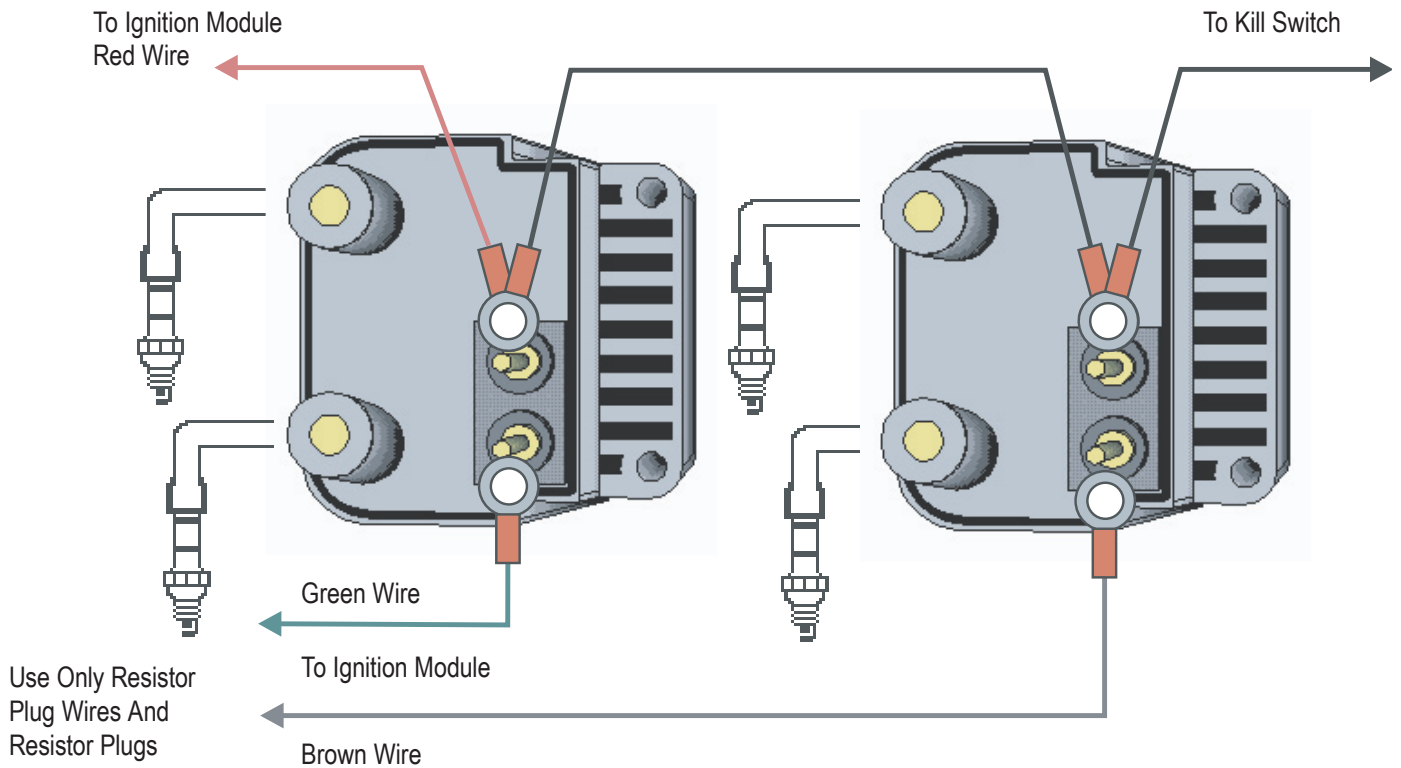

IMPORTANT NOTE: DF coils can not be wired for 2 plug per cylinder Dual Fire. You are jumping double the gap under compression when dual plugging. If both plug on same cylinder are gapped at 0.040" your jumping 0.080 under pressure. Would you gap a single plug at 0.080 under raised compression. Recommended sparkplug gap setting no more than 0.025"

